


# SCREWED / SWEAT BRONZE "Y" STRAINERS – 125YTB / 125YSB Series



Model 125YTB – Threaded Ends  
Model 125YSB – Sweat Ends

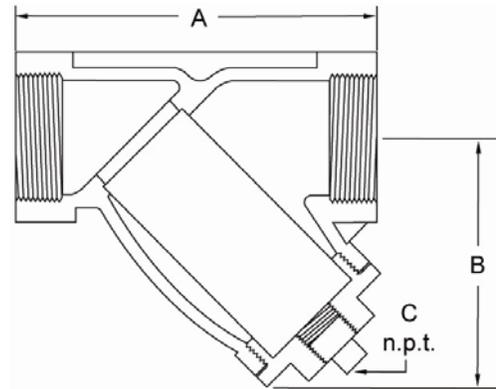

## RATINGS

PMO (maximum operating pressure): 125 psi @ 353°F  
200 psi @ 150°F

## NOTES

- **SCREENS:** 20 Mesh type 304SS supplied as standard in sizes up to 2". 3/64" perforated type 304SS supplied as standard in sizes 2-1/2" to 3". Other meshes, perforations and materials are available upon request
- **CAPS:** Straight threaded and gasketed caps with a plugged blowdown connection are standard on all sizes.

## MATERIALS

PART	DESCRIPTION
Body	B62 – Cast Bronze
Screen	304 Stainless Steel
Gasket	Teflon
Cap	B62 – Cast Bronze
Plug	B62 – Cast Bronze

## DIMENSIONS AND WEIGHTS

Size		DIMENSIONS								Weight	
		A (125YTB)		A (125YSB)		B		C			
mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs
10	3/8	82	3-1/4	86	3-3/8	55	2-1/8	10	3/8	0.45	1
15	1/2	82	3-1/4	86	3-3/8	55	2-1/8	10	3/8	0.45	1
20	3/4	100	4	100	4	70	2-3/4	15	3/8	0.57	1-1/4
25	1	115	4-1/2	127	5	75	3	15	1/2	0.91	2
32	1-1/4	136	5-3/8	149	5-7/8	90	3-1/2	15	1/2	0.91	2
40	1-1/2	158	6-1/4	175	6-7/8	98	3-7/8	15	1/2	1.36	3
50	2	191	7-1/2	216	8-1/2	138	5-1/2	15	1/2	3.18	7
65	2-1/2	230	9-1/16	230	9-1/16	150	6	15	1/2	4.42	9-3/4
80	3	260	10-1/4	260	10-1/4	160	6-1/4	15	1/2	5.9	13

Colton has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice



Tel: 1-888-300-9155 Fax: 1-888-300-9160 www.COLTONIND.com info@coltonind.com