


SCREWED CAST IRON BASKET STRAINERS



Model 125BTI

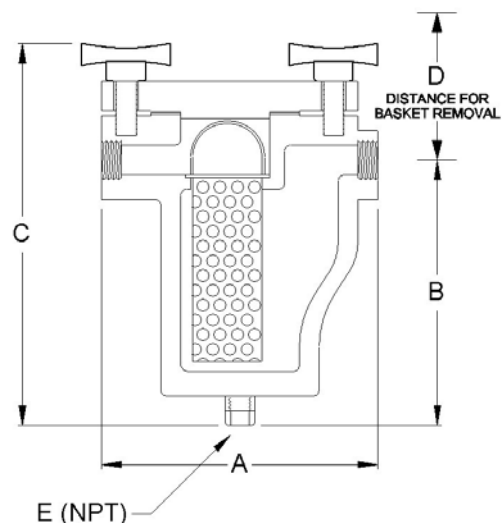

RATINGS

PMO: (maximum operating pressure): 200 psi @ 100°F
125 psi @ 353°F

FEATURES

- **SCREENS:** 1/32" perforated type 304 stainless steel on sizes up to 1-1/2". 3/64" perforated type 304 stainless steel on sizes 2" and larger. Optional screen materials and sizes are available upon request.
- **COVER:** Quick-opening rotating cover with O-ring seal

MATERIALS

PART	DESCRIPTION
Body	ASTM A126 Grade B Class 30
Cover	ASTM A126 Grade B Class 30
Screen	304 Stainless Steel
Plug	ASTM A126 Grade B Class 30
Gasket	Buna-N

DIMENSIONS AND WEIGHTS

Size		DIMENSIONS										Weight	
		A		B		C		D		E			
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs
15	1/2	102	4	102	4	168	6-5/8	178	7	10	3/8	4.5	10
20	3/4	137	5-3/8	127	5	213	8-3/8	203	8	15	1/2	8.2	18
25	1	137	5-3/8	127	5	213	8-3/8	203	8	15	1/2	8.2	18
32	1-1/4	171	6-3/4	149	5-7/8	251	9-7/8	206	8-1/8	15	1/2	13.6	30
40	1-1/2	178	7	165	6-1/2	270	10-5/8	213	8-3/8	20	3/4	13.6	30
50	2	216	8-1/2	191	7-1/2	295	11-5/8	251	9-7/8	32	1-1/4	22.7	50
65	2-1/2	292	11-1/2	232	9-1/8	387	15-1/4	337	13-1/4	32	1-1/4	28.1	62
80	3	292	11-1/2	232	9-1/8	387	15-1/4	343	13-1/2	32	1-1/4	28.1	62

Colton has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice



Tel: 1-888-300-9155 Fax: 1-888-300-9160 www.COLTONIND.com info@coltonind.com

BULLETIN STR500-1